

Pressure Switch Assembly

P/N: 31-194133-0X



A UTC Fire & Security Company

F-93-3119.0

FEATURES

- Easy Installation
- Available Normally Open or Normally Closed
- Explosion Resistant Cable Optiony

DESCRIPTION

This pressure switch assembly mounts directly to a check valve on Fenwal spherical FM-200® agent storage containers to trigger a TROUBLE condition when container pressure drops below 200 PSIG \pm 15 PSI. Assemblies are available with normally open or normally closed contacts, and with standard or explosion resistant cable assemblies.

OPERATION

Normally Open: The pressure switch contacts are closed when the container is pressurized in accordance with specifications. The contacts open when pressure drops below 200 PSIG.

Normally Closed: The pressure switch contacts are open when the container is pressurized in accordance with specifications. The contacts close when pressure drops below 200 PSIG.




Pressure in a normally filled container will drop below 200 psig at or below a temperature of 10°F (-12°C). Accordingly, this modification is not recommended for low temperature applications.

INSTALLATION

To install the pressure switch assembly, first unscrew the guard around the unused boss on the container and remove the safety plug from the check valve. Secure the check valve hex with a wrench to guard against loosening the check valve. Screw the pressure switch into the check valve beyond hand tight, and then attach the cable assembly by screwing the housing over the threaded boss. Connect the cable assembly to the control unit in accordance with the system schematic.



Use wrench on check valve to avoid over tightening and when loosening components for removal.

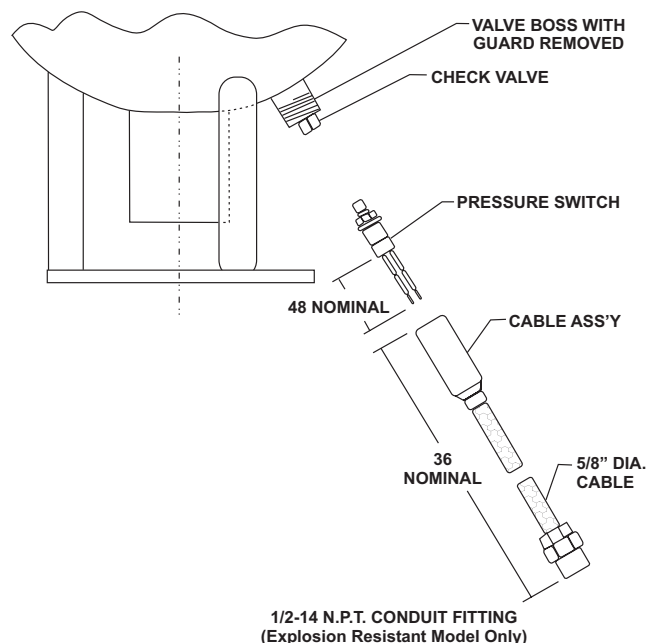

1/2-14 N.P.T. CONDUIT FITTING
(Explosion Resistant Model Only)

ORDERING INFORMATION

Standard Pressure Switch Assembly	
Normally Open:	P/N 31-194133-001
w/ Explosion Resistant	
Cable Assembly*:	P/N 31-194133-002
Standard Pressure Switch Assembly	
Normally Closed:	P/N 31-194133-003
w/ Explosion Resistant	
Cable Assembly*:	P/N 31-194133-004

Note*: Explosion resistant cable assemblies for Class 1, Groups C and D; Class 2, Groups E, F and G locations.

SPECIFICATIONS

Current Rating:	1 Amp @ 120/240 Vac, Resistive 2 amps @ 24 Vdc
Contacts Open:	200 \pm 15 PSIG

ARCHITECT/ENGINEER SPECIFICATIONS

The Pressure Switch Assembly shall be used with Fenwal spherical FM-200 agent storage containers to provide supervision of loss of pressure and/or extinguishing agent by indication of a Trouble signal at the Fenwal control unit. It shall consist of a cable assembly and a pressure switch. It shall be mounted directly on the container by means of a boss-mounted check valve to facilitate removal of the pressure switch without losing FM-200 agent.

Normally Open: The contacts of the switch shall be closed when the container is pressurized in accordance with specifications. The contacts will open when container pressure drops below 200 ± 15 PSIG. This switch shall not be used for applications where ambient temperatures could drop to 10°F (12°C) or lower as this temperature will cause normal vessel pressure to drop below 200 PSIG.

Normally Closed: The contacts of the switch shall be open when the container is pressurized in accordance with specifications. The contacts will close when container pressure drops below 200 ± 15 PSIG. This switch shall not be used for applications where ambient temperatures could drop to 10°F (12°C) or lower as this temperature will cause normal vessel pressure to drop below 200 PSIG.

The explosion resistant cable assembly shall be designed for hazardous locations, Class 1, Groups C and D, Class 2, Groups E, F and G. Its contacts shall be rated at 1 Amp at 120/240 Vac and 2 Amps at 24 Vdc.

Fenwal is a registered trademark of Kidde-Fenwal, Inc.
FM-200 is a registered trademark of the Great Lakes Chemical Corporation.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.
If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.



A UTC Fire & Security Company

400 Main Street
Ashland, MA 01721
Ph: 508.881.2000
Fax: 508.881.8920
www.fenwalfire.com