

High Pressure Carbon Dioxide


Actuation Components

Description

The Stainless Steel Actuation Hose is used to connect the actuation line flared tees between each agent tank. The hose has the same thread, 7/16-20, as the flared tees. The actuation hose allows flexibility between the rigid actuation piping and the tank valve.

Minimum Bend Radius: 27/32 in. (21 mm)

Shipping Assembly Part No.	Description
31809	Stainless Steel Braided Hose, 16 in. (40.6 cm) Female-to-Female
32335	Stainless Steel Braided Hose, 20 in. (50.8 cm) Female-to-Female
32336	Stainless Steel Braided Hose, 24 in. (60.9 cm) Female-to-Female
73596	Stainless Steel Braided Hose, 12 in. (30.5 cm) Male-to-Female
73597	Stainless Steel Braided Hose, 16 in. (40.6 cm) Male-to-Female
73598	Stainless Steel Braided Hose, 20 in. (60.9 cm) Male-to-Female
415142	Stainless Steel Braided Hose, 32 in. (81.3 cm) Male-to-Female
430815	Stainless Steel Braided Hose, 42 in. (107cm) Male-to-Female

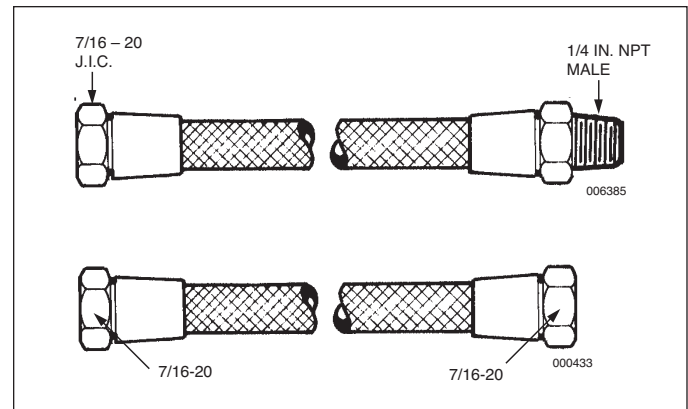

Additional Actuation Fittings

Part No.	Description
73236	CV-98 Actuation Adapter
32338	Male Straight Connector (7/16-20 JIC x 1/4 in. NPT)
32334	Male Elbow (7/16-20 JIC x 1/8 in. NPT)
31810	Male Elbow (7/16-20 JIC x 1/4 in. NPT)
418359	Male Branch Tee (7/16-20 JIC x 1/8 in. NPT)
31811	Male Branch Tee (7/16-20 JIC x 1/4 in. NPT)