

# FM-200<sup>®</sup> Component Description




## Nitrogen Pilot Cylinder, Bracket, and Adapter

A UTC Fire & Security Company

F-93-5050

### FEATURES

- For use with UL Listed, ULC Listed & FMRC Approved Systems

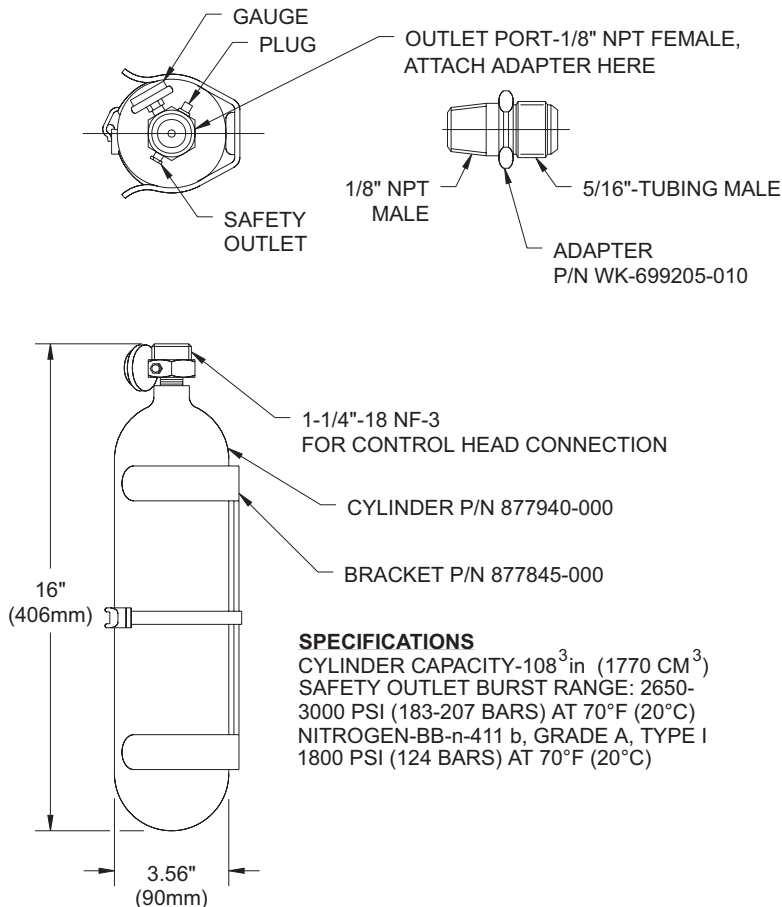

**SPECIFICATIONS**  
 CYLINDER CAPACITY-108<sup>3</sup>in (1770 CM<sup>3</sup>)  
 SAFETY OUTLET BURST RANGE: 2650-3000 PSI (183-207 BARS) AT 70°F (20°C)  
 NITROGEN-BB-n-411 b, GRADE A, TYPE I  
 1800 PSI (124 BARS) AT 70°F (20°C)

### MATERIALS

**CYLINDER: STEEL, PAINTED BLACK**  
**VALVE: BRASS**  
**BRACKET: STEEL, PAINTED BLACK**  
**ADAPTER: BRASS**

P/N	Description
877940	Standard
06-129773-001	Normally Closed Open Under Pressure
06-129773-002	Normally Open Closed Under Pressure

FM-200 is a Registered Trademark of Great Lakes Chemical Corporation.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.

Fenwal Protection Systems  
 A UTC Fire & Security Company  
 400 Main Street  
 Ashland, MA 01721  
 Ph: 508.881.2000  
 Fax: 508.881.8920  
[www.fenwalfire.com](http://www.fenwalfire.com)