

Fenwal Engineered Fire Suppression System

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid

1/4-inch Flexible Actuation Hose Data Sheet

F-44-5070




A UTC Fire & Security Company

P/N: 26498X

FEATURES

- For use with UL Listed, ULC Listed, and FM Approved Systems

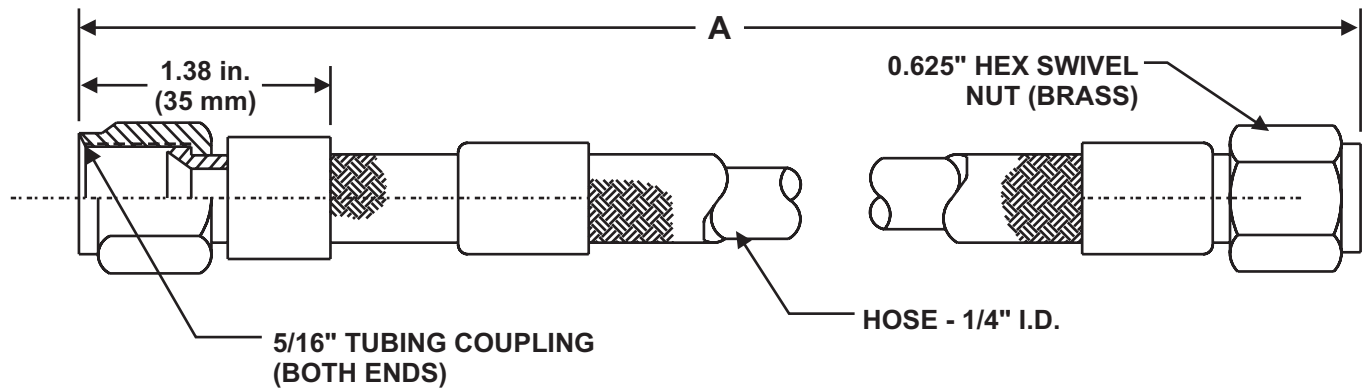

Part Number	Dimension A
264986	30 in. (762 mm)
264987	22 in. (559 mm)

MATERIAL

- Hose: Wire Braided, Teflon® Lining (CRES T304)
- Couplings: Brass

TECHNICAL DATA

- Minimum Burst Pressure: 12000 PSIG
- Operating Pressure: 3000 PSIG
- Test Pressure: 4500 PSIG
- Minimum Bend Radius: 2-1/2 inches

Fenwal is a registered trademark of Kidde-Fenwal, Inc.
3M and Novec are trademarks of 3M.
All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.

If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.