

Fenwal Engineered Fire Suppression System

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid

3/8-inch Check Valve Data Sheet

F-44-5100




A UTC Fire & Security Company

P/N: WK-261193-000

FEATURES

- For use with UL Listed, ULC Listed, and FM Approved Systems

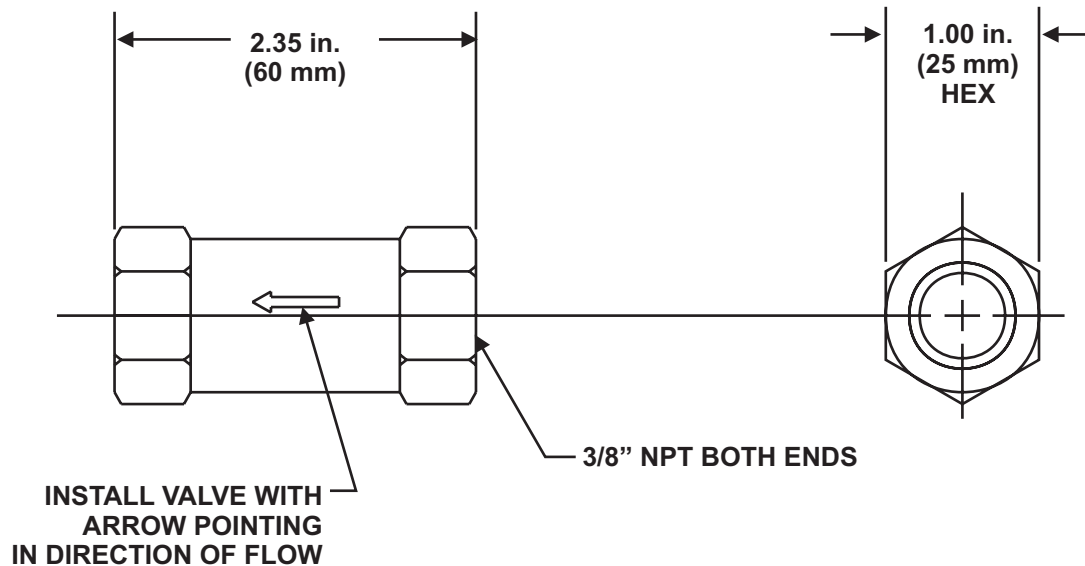

MATERIALS

- Body: Brass
- Seal: BUNA-N

TECHNICAL DATA

- Working Pressure: 0 to 5000 PSI (0 to 345 bar)
- Proof Pressure: 10000 PSI (690 bar)
- Cracking Pressure: 2 to 4 PSI (0.14 to 0.28 bar)
- Operating Pressure: -40°F to 250°F (-40°C to 121°C)

Fenwal is a registered trademark of Kidde-Fenwal, Inc.
3M and Novec are trademarks of 3M.
All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.

If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.