

Fenwal Engineered Fire Suppression System

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid

180 Degree Pendant Nozzle Data Sheet

F-44-2150




A UTC Fire & Security Company

P/N: 44-1946XX-XXX

FEATURES

- For use with UL Listed, ULC Listed, and FM Approvals Systems

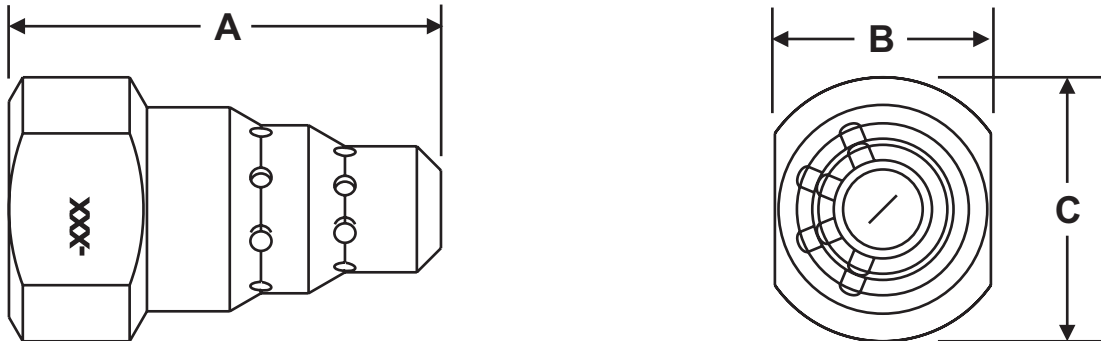

Notes: A selection of orifices are available for each nozzle size and make. Consult the Fenwal Engineered Fire Suppression System Design, Installation, Operation and Maintenance Manual for details.

Nozzles are available in either stainless steel or brass.

Pipe Size	Dimensions		
	A	B	C
1/4 in. (6 mm)	1-29/32 in. (49 mm)	1-1/32 in. (26 mm)	7/8 in. (22 mm)
3/8 in. (10 mm)	2-1/32 in. (52 mm)	1 in. (25 mm)	1-3/16 in. (30 mm)
1/2 in. (13 mm)	2-1/4 in. (57 mm)	1-1/8 in. (29 mm)	1-3/8 in. (35 mm)
3/4 in. (19 mm)	2-11/16 in. (68 mm)	1-3/8 in. (35 mm)	1-5/8 in. (41 mm)
1 in. (25 mm)	2-7/8 in. (73 mm)	1-5/8 in. (41 mm)	1-15/16 in. (49 mm)
1-1/4 in. (32 mm)	3-19/64 in. (83 mm)	2 in. (51 mm)	2-3/8 in. (60 mm)
1-1/2 in. (38 mm)	3-5/8 in. (92 mm)	2-1/4 in. (57 mm)	2-11/16 in. (68 mm)
2 in. (51 mm)	4-1/2 in. (114 mm)	3 in. (76 mm)	3-1/2 in. (89 mm)

Fenwal is a registered trademark of Kidde-Fenwal, Inc.
3M and Novec are trademarks of 3M.
All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.

If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.