re

Fenwal Engineered Fire Suppression System

Designed for use with 3M[™] Novec[™] 1230 Fire Protection Fluid


Pressure Operated Switch Data Sheet

F-44-5180

P/N: 81-486536-000

FEATURES

For use with UL Listed, ULC Listed, and FM Approved Systems

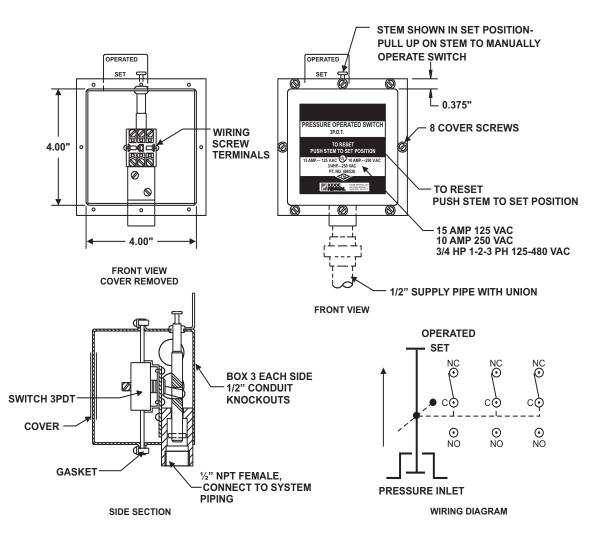

Contact Ratings (3 PDT)

15 Amp @ 125 Vac

10 Amp @ 250 Vac

3/4 HP @ 250 Vac

1, 2, or 3 Phase

NOTES

- The switch may be mounted in any position, however, the preferred installation is upright, as shown.
- Any load connection to the switch must not exceed the switch rating, and shall utilize a suitable protection device (i.e., circuit breaker, fuse).

Fenwal is a registered trademark of Kidde-Fenwal, Inc. 3M and Novec are trademarks of 3M. All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.

If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.

Fenwal Protection Systems A UTC Fire & Security Company 400 Main Street Ashland, MA 01721 Ph: 508.881.2000 Fax: 508.881.8920 www.fenwalfire.com



A UTC Fire & Security Company